



Power cable connector(splash-proof)

Cable multi-outlet plate B
(for I/O and pendant cables)

Cable multi-outlet plate A
(for motor and encoder cables)

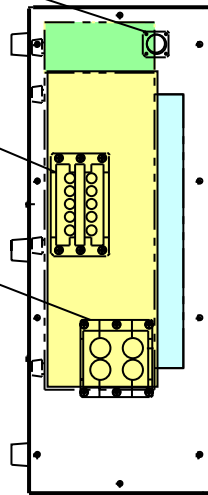

Front

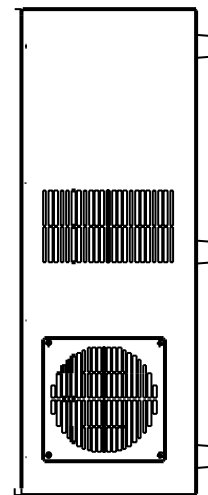


Back

Transparent window
(for checking the
controller's model name)

Heat exchanger
(DS5-2153B23-FB11)

Internally
ventilating fan

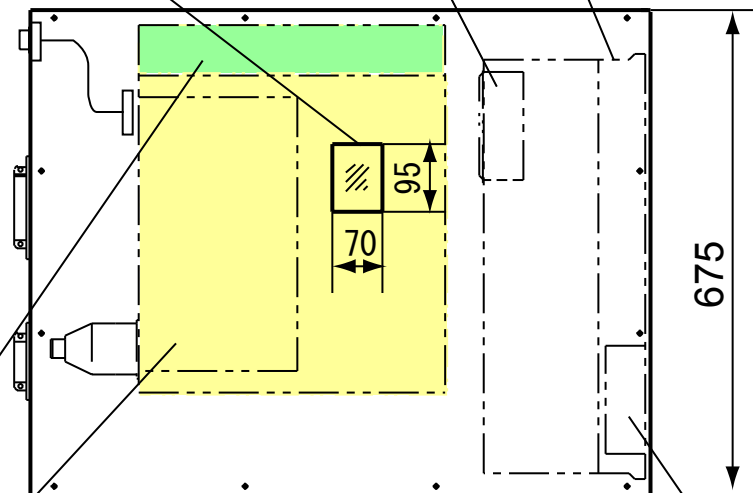

Safety box(if provided)

Robot controller

Rubber feet

I/O conversion box

Externally
ventilating

(Unit : mm)