



Power cable connector(splash-proof)

Cable multi-outlet plate B  
(for I/O and pendant cables)

Cable multi-outlet plate A  
(for motor and encoder cables)

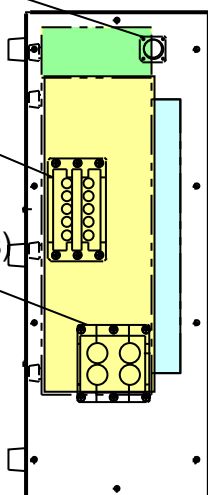

正面

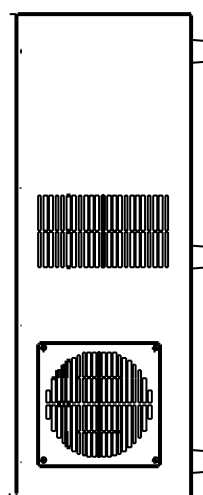


背

Transparent window  
(for checking the  
controller's model name)

Heat exchanger  
(DS5-2153B23-FB11)

Internally  
ventilating fan

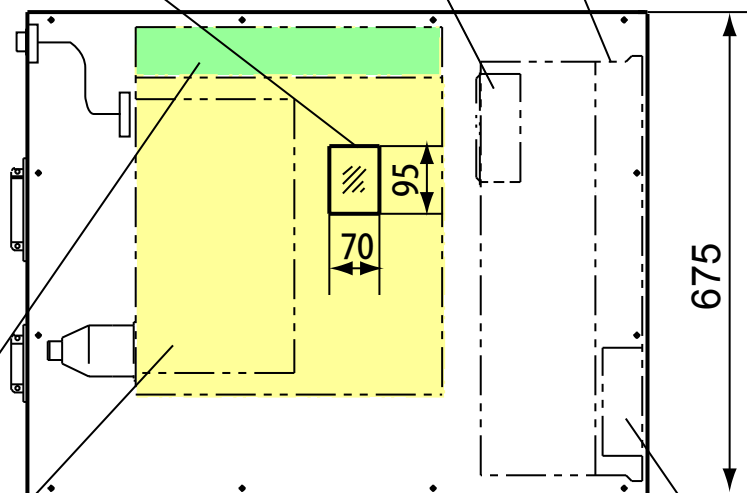

Safety box(if provided)

Robot controller

860

675

Externally  
ventilating

Rubber feet

I/O conversion box

252.5

25

(单位 : mm)