

Unit: mm

Type	A	B	C	D	F	G	H
HMS-4070*, HMS-4A70*	700	350	350	211	290°	387	300
HMS-4085*, HMS-4A85*	850	350	500	311	284°	397	178


S (Z axis stroke)	L1	L2	L3	
			10kg	20kg
200	-656	-456	49	43
300	-756	-456	149	143
400	-856	-456	249	243

Note 1: Values denote dimensions for the 10kg payload type (HMS-40***), and values enclosed in () denote dimensions for the 20kg payload type (HMS-4A***).


Note 2: The workable space is limited so that the unit does not interfere with the cables.

Note 3: In the case of the overhead-mount type, the Z axis in the uppermost position may reach higher than the base mounting face. Be careful with the interference with surrounding facilities.

Detailed drawing of hand mounting face (Viewed from E). (Note 1)

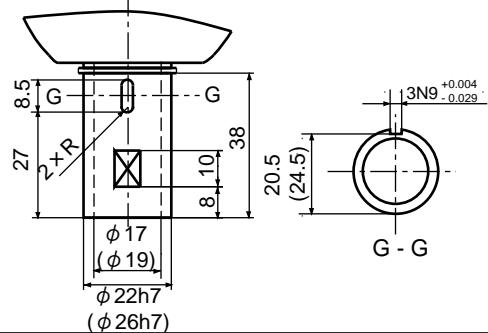

Flange (option) mounting face (Note 1)

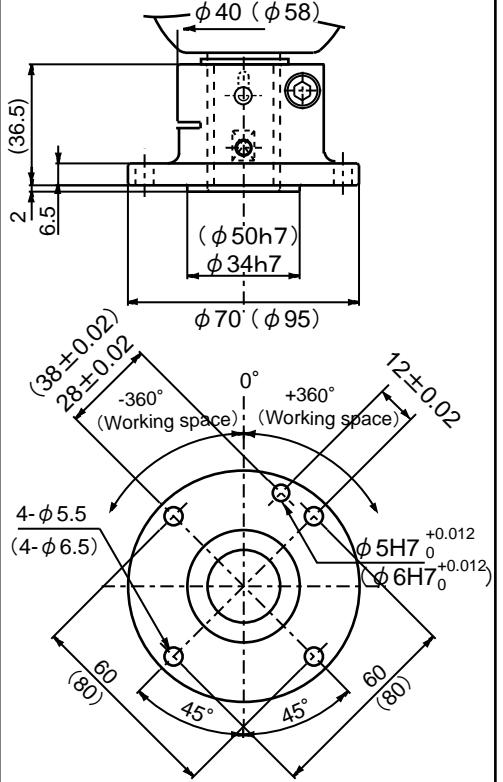

Base mounting dimensions (Viewed from the bottom)

